


GAS DISTRIBUTION SYSTEMS (GDS)



LOGOS
KİMYA TEKNOLOJİLERİ

| Gas Distribution Systems



SPECIFICATIONS



- Automated gas distribution and control units
- Software development for system integration
- Tested according to MILL-STD-810H
- High purity according to DEF/STAN 58/96 standard
- Design flexibility according to requirements
- Self cleaning test option with inner JT Cooler
- Suitable for use with argon, nitrogen, and dry air


TECHNICAL SPECIFICATIONS

- Operating Voltage: 28 VDC
- Endurance Temperature: -40°C / +63°C
- Maximum Working Pressure: 690 bar
- Proof Pressure: 1000 bar
- Pneumatic Connection Type: 1/4" MP*
- Operating Speed: 70 rpm
- Weight: 25 kg
- Electrical Connection Connector: D38999 military type connectors



Gas Distribution Systems

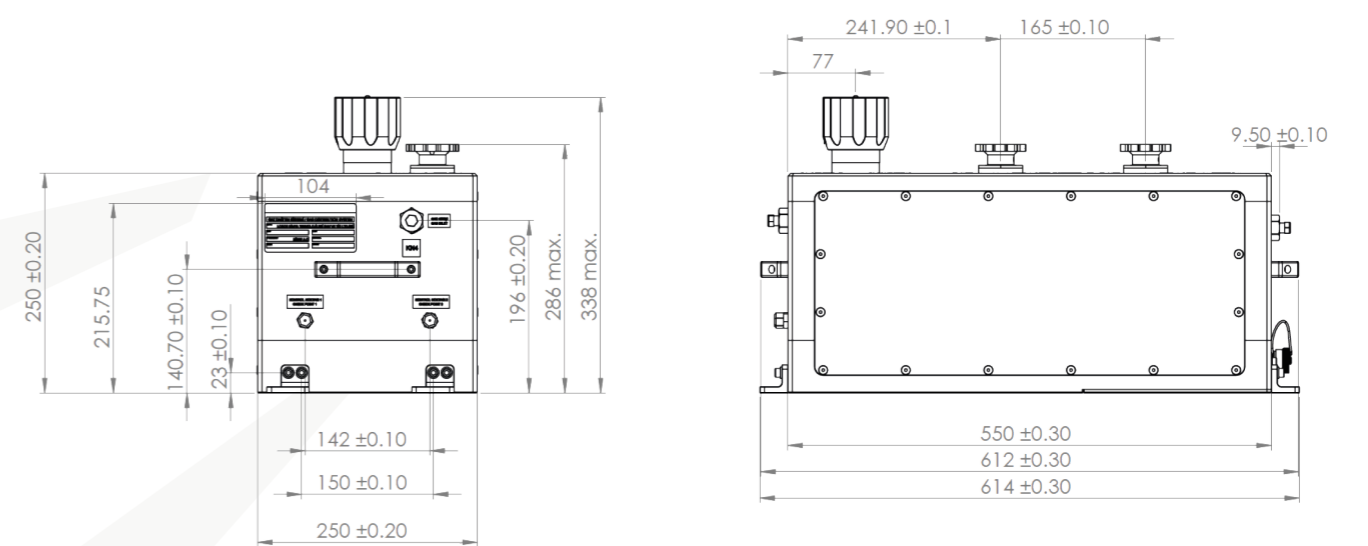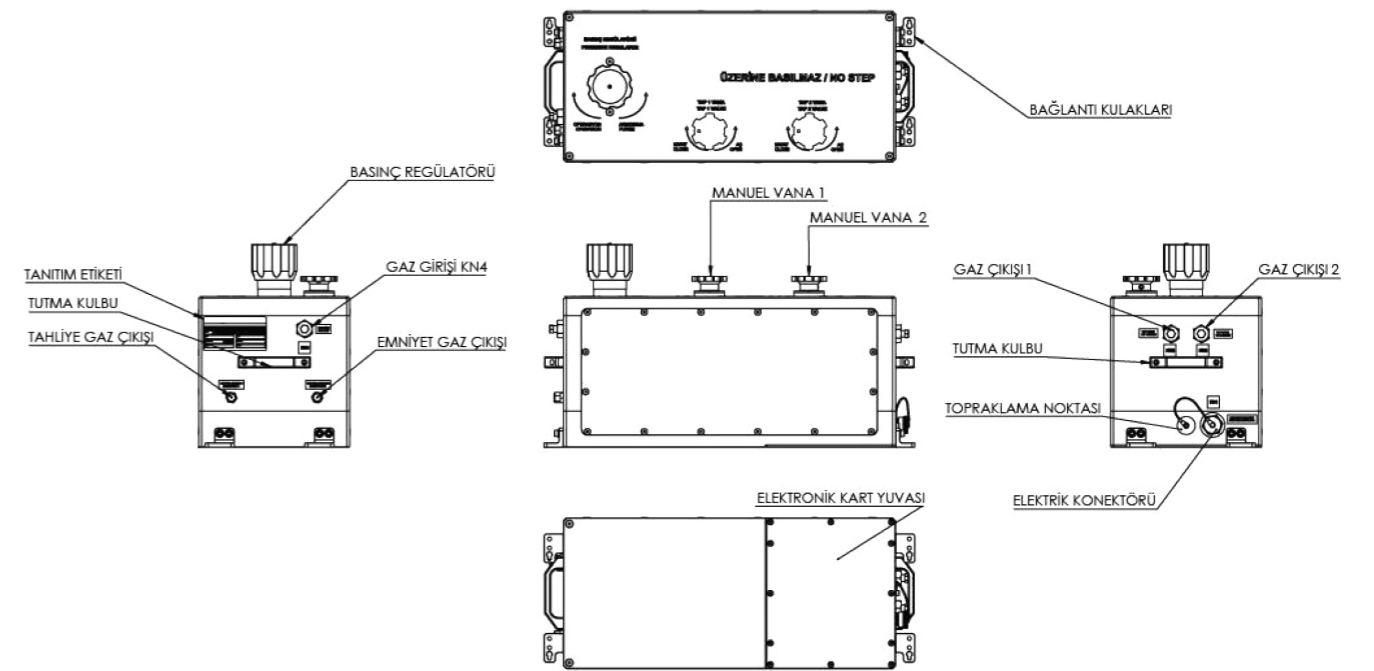

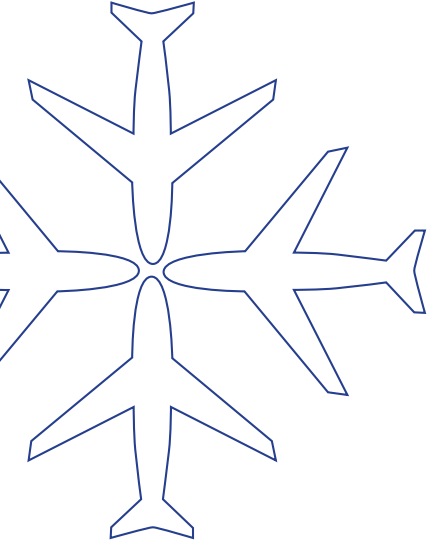

Contact us



Address

Logos Kimya Teknolojileri Sanayi ve Ticaret Ltd. Şti.
OSTİM Mah. 1151. Sk 1/64 Gül 86 Sitesi Yenimahalle ANKARA

Contact

Phone: +0(312) 385 20 82
Email: info@logoskimya.com
Web: logoskimya.com

